APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339
info@appmeas.co.uk
https://appmeas.co.uk

INT2-L Panel Mount Load Cell Digital Indicator

THIS PRODUCT HAS BEEN DISCONTINUED

Key Features:

- 6-Digit LED Display (±199999)
- Input: up to 40mV/V
- Environmental Protection: IP65 (when installed)
- 10Vdc Load Cell Excitation @ 120mA max.
- Powers up to 4 x 350ohm Load Cells
- Options: Alarm Relays, Analogue & Digital Outputs
- Customisation of Software
- Portable Desktop Enclosure
- Ideal Replacement for Druck DPI 280 & 281 Indicators
- Simple, Menu Free Operation
- Compatible with any Strain Gauge Based Transducers
- Robust Construction
- Panel Mounted, 1/8 DIN Size
- Front Face Sealed to IP65
- 3 Year Warranty

PLEASE USE OUR LOAD CELL DIGITAL INDICATOR | HIGH ACCURACY | INTUITIVE4-L INSTEAD

Request INT4-L Pricing

The INT2-L meter's main function is to display physical variables, such as weight, load, force and torque. It provides you with a 10V regulated excitation supply, capable of powering up to four 350 Ohm loadcells. This can be used in 4 wire or 6 wire installations. You can linearise signals with the 10 point user configurable lineariser, which is a standard feature on the INT2-L indicator.

The INT2-L is easy to configure with no complex menu system. The readout is provided by a 6-digit LED display coupled with an ultra-high resolution 20-bit A/D converter and highly stable strain gauge bridge excitation source which provides superb resolution and stability in any application. The front panel has a 7 segment window for displaying the measurement allowing decimal point and minus sign characters to be included and has 4 alarm annunciators to show the status of each alarm relay

Peak and valley memories allow you to view the maximum and minimum recorded measurements. Also, the meter can give alarm outputs, scaled and isolated analogue output and isolated serial data retransmission, when fitted with option boards.

A lockout switch on the rear of the meter saves your configuration settings in non-volatile memory, which has a 10 year guaranteed storage period. When the lockout switch is set to ON, your settings cannot be accidentally altered.

Our 3-year warranty applies to the Intuitive2-L and to any of our extensive range of transducers supplied with it, please contact our sales team. See our range of digital indicators.

Options:

- 95-265VAC or 11-30VDC Supply
- Analogue Outputs
- RS232 or RS485
- 2x or 4x Mechanical Alarm Relays (rated 5A @ 250Vac), 2x SPCO Relays or Dual Solid State Relays.

APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339
info@appmeas.co.uk
https://appmeas.co.uk

Industries:

- Automotive
- Agriculture
- Silo and Weighing Industry
- Construction
- Alternative Energy
- Civil Engineering
- Lifting and Handling
- Waste Management

Applications:

- Weighing Platforms
- Vessel Weighing Systems
- Weighbridges
- Conveyor Weighing Systems
- Bridge Structure Monitoring
- Waste Management Systems
- Lifting and Handling
- Monitoring of Anchor Loads
- Truck Load Weight Monitoring
- Skip Weighing System
- Multi-Cell or Multi-Transducer Installations
- Monitoring of Building Foundations
- Force Measurement in Formula Racing
- Silo Weighing
- Measuring the Power Output of a Motor
- Vessel Weighing Systems

Specification:

CHARACTERISTICS	INTUITIVE2-L	UNITS
Display	6 digit, 7 segment LED, 14mm high (-199999 to +199999)	
Resolution	1:400,000 max. (bipolar)	
Display Update Rate:	10/second	
Accuracy	<±0.05	% of range of mV input
Bridge Excitation	10.0±0.1% (option: 5.0±0.1%)	Volts dc
Maximum Excitation Current	120.0	mA
Input Range	0.5-3 (options: 5, 10, 30, 100 or 500)	mV/V for max. display reading
Input Impedance	>10	Megaohms
Digital Filtering	0 to 5 (adjustable)	Seconds effective time constant
Display Count By	1, 2, 5, 10, 20, 50 digits (selectable)	
Analogue Output (Optional)	±10Vdc, 0-10Vdc or 4-20mA	
Operating Temperature	0 to +50	˚C
Thermal Drift	Span = 25, Zero = 30	ppm/˚C
Operating Voltage	95-265VAC (11-30VDC optional)	
Environmental Protection	IP65 (IP67 optional)	
Weight	300	Grams
Panel Cutout	1/8 DIN (92mm x 45mm + I/-0)	
Features	Tare facility, peak & valley detection, 10-point linearisation, 1 program memory (8 optional)	
Trip Outputs (optional)	2x or 4x relays rated 5A @ 250Vac, 2x SPCO or 2x solid state	
Serial Data Output (optional)	RS232 / RS485	
	Please consult sales regarding option requirements	

APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339
info@appmeas.co.uk
https://appmeas.co.uk

Ordering Codes:

INT2-L-ANI-AL2-0-R-AC-MEM	INT2	-	L	-	ANI	-	AL2	-	0	-	R	-	AC	-	MEM
Product Family															
INT2	INT2														
Input Version															
L = Load Cell Input			L												
P = Process Input			P												
C = Rate/Speed Input			C												
Analogue Output															
0 = None Fitted					0										
ANI = 4-20mA					ANI										
ANV = 0-10Vdc (uni-polar)					ANV										
ANB = ±10Vdc (bi-polar)					ANB										
Alarm Relays															
0 = None Fitted							0								
AL2 = 2 x Alarm Relays							AL2								
AL4 = 4 x Alarm Relays							AL4								
SPCO = 2 x SPCO Relays							SPCO								
DSS = 2 x Solid State Relays							DSS								
Serial Data Output															
0 = None Fitted									0						
232 = RS232									232						
485 = RS485									485						
EN = Ethernet									EN						
PDP = Profibus DP									PDP						
Display Colour															
R = Red											R				
G = Green											G				
RDLV = Red for Daylight Viewing											RDLV				
B = Blue											B				
Y = Yellow											Y				
W = White											W				
Supply Voltage															
AC = 95-265Vac Universal Mains Supply													AC		
DC = 11-30Vdc													DC		
Additional & Special Features															
Blank = None															Blank
MEM = 8 Calibration Memory (8 different load cells) - Requires 8-way Switch															MEM
100X = Fast Version with 100 Updates/Second															100X
PL = Plain Front Cover (no buttons)															PL
SPC4 = IP67 Front Panel Cover															SPC4
Other special features will be determined by sales.															

APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339
info@appmeas.co.uk
https://appmeas.co.uk

Dimensions (mm):

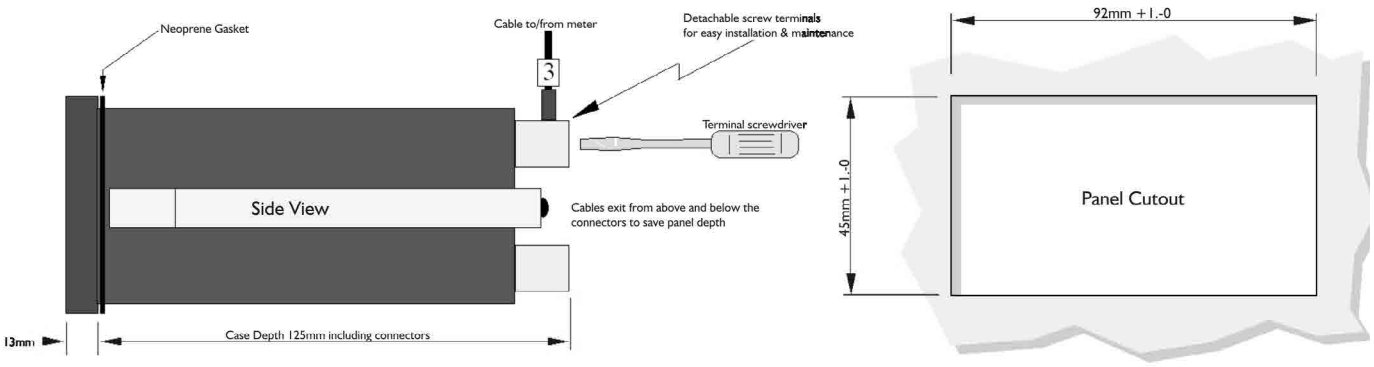

Associated Products:

Load Cells & Force Sensors

T24 Wireless Telemetry Range

AML/SGD Displacement Sensor

DSC-USB USB Signal Digitiser

Torque Transducers & Torque Sensors

Pi600 Pressure Sensor

Request INT4-L Pricing