



APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339

info@appmeas.co.uk

<https://appmeas.co.uk>

DBB Series S-Beam Load Cell

Key Features:

- Capacities 50kg to 6000kg
- For sub-50kg Capacities see [DBBSM](#))
- Sealed to IP67
- Output: 2mV/V
- Accuracy: $<\pm 0.03\%/RC$
- Simple Installation
- High Performance
- Robust Nickel-Plated Alloy Steel Construction
- 3 Year Warranty



Use in Tension and /or Compression for Force and Load Measurement

The DBB series of S-Beam load cells are designed for use in tension and compression and lend themselves to both force measurement and weighing applications alike.

There are two versions available covering the standard range which are the DBBE and the DBBWAS. The DBBE is a dual bending beam design sealed to IP67 covering ranges from 50kg to 1000kg, the DBBWAS is a shear web design covering ranges of 0-1500kg to 0-6000kg, fully potted and sealed to IP67. All models are manufactured from nickel-plated alloy steel.

Both the dual bending beam and the shear web design offer high accuracy performance of better than $\pm 0.03\%$ of the rated capacity.

Their ease of mounting makes them very attractive for use as a general purpose load cell.

Options:

- Equivalents to Other Manufacturers Available
- Spherical Rod End Bearings
- Load Buttons
- Different Cable Lengths
- Mounting Hardware
- TEDS (Transducer Electronic Data Sheet)
- TEDS Allows Plug & Play with TEDS Enabled Instrumentation.
- USB Versions (via DSC-USB)
- Single or Multi-Channel PC-Based Monitoring & Data Logging System
- Wireless Version (via T24 instrumentation)

Applications:

- Force & Load Measurement Applications
- Suspended Hoppers
- Geotechnical Test Equipment
- Tensile Testing Machines
- Materials Testing
- Bag Fillers
- Conversion of Mechanical Scales to Digital
- Dynamometers









Specification:

	DBBE	DBBWAS	UNITS
Rated Capacity (RC)	0-50, 0-100, 0-150, 0-200, 0-300, 0-500, 0-1000	0-1500, 0-2000, 0-3000, 0-5000, 0-6000	kg
Operating Modes	Tension/Compression / Tension & Compression		
Sensitivity (RO)	2.0 ±0.1%	2.0±0.1%	mV/V
Zero Balance/Offset	<2	<2	±%/Rated Output
Total Error	<0.03	<0.03	±%/Rated Output
Zero Return after 30 mins	<0.03	<0.03	±%/Applied Load
Output Symmetry (tension vs. compression)	<0.2 typical		±%/Rated Output
Temperature Effect on Zero	<0.003	<0.003	±%/Rated Load/°C
Temperature Effect on Sensitivity	<0.0015	<0.0015	±%/Applied Load/°C
Input Resistance	400 ±20	400 ±20	Ohms
Output Resistance	350 ±3	350 ±3	Ohms
Insulation Resistance	>2000	>2000	Megohms @ 50Vdc
Excitation Voltage	10 recommended (2-15 acceptable)		Volts AC or DC
Operating Temperature Range	-30 to +70	-30 to +70	°C
Compensated Temperature Range	-10 to +45	-10 to +45	°C
Storage Temperature Range	-30 to +70	-30 to +70	°C
Safe Overload	150	150	% of Rated Capacity
Ultimate Overload	300	300	% of Rated Capacity
Deflection @ Rated Capacity	<0.4	<0.4	mm
Fundamental Resonant Frequency*	200 to 1000 typical depending on capacity	200 to 1000 typical depending on capacity	Hz
IP Rating (Environmental Protection)	IP67	IP67	
Weight (excluding cable)	0.7	0.7	kg
Fatigue Life	10 ⁸ cycles typical (10 ⁹ cycles on fatigue-rated version)		
Cable Length (as standard)	6	6	metres
Cable Type	6-core screened, PUR sheath, Ø6.3	6-core screened, PUR sheath, Ø6.3	
Construction	Nickel Plated Alloy Steel	Nickel Plated Alloy Steel	
Resolution:	1 part in 250,000 (with appropriate instrumentation)		

*The resonant frequency is calculated with the body of the load cell attached to a large plate, ensuring that only the sensing element oscillates: This is vital to achieve the highest natural frequency and subsequent frequency response.

Wiring Diagram:

Wire	Designation
 Red	+ve excitation
 Black	+ve sense
 Blue	-ve excitation
 White	-ve sense
 Green	+ve signal (tension)
 Yellow	-ve signal



APPLIED MEASUREMENTS LTD.
Transducer Specialists...



+44 (0) 118 981 7339

info@appmeas.co.uk

<https://appmeas.co.uk>

Dimensions (mm):

Model	Capacity (kgf)	H	L	W	WI (nom)	HI	Threads T
DBBE	0-50, 0-1000	80	62.1	18	22	15	M12 x 1.75
DBBWAS	0-1500	90	70	32	36	19	M16 x 2.0
DBBWAS	0-2000	90	70	32	36	19	M16 x 2.0
DBBWAS	0-3000	120	100	45	45	26	M24 x 2.0
DBBWAS	0-5000	120	100	45	45	26	M24 x 2.0
DBBWAS	0-6000	120	100	45	45	26	M24 x 2.0

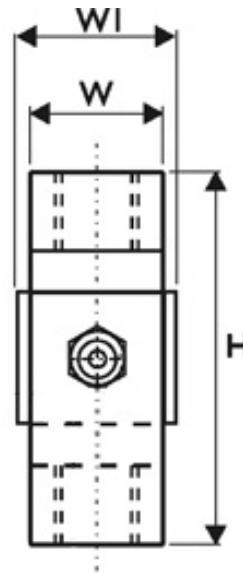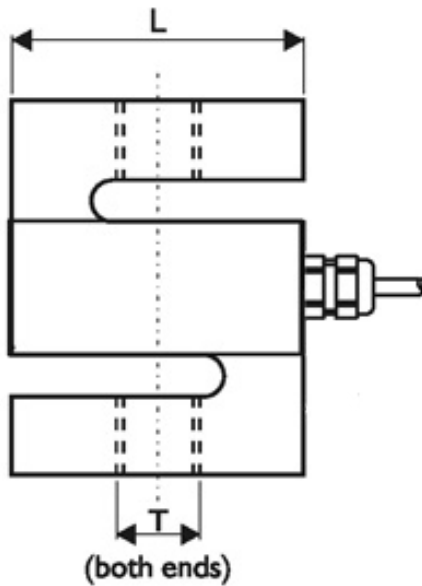

Ordering Codes:

Core Product	Capacity (inc Engineering Units)	Cable Length (m)	Specials Code	Example Result
DBBE	50kg	006	000	DBBE-50kg-006-000
DBBE	100kg	006	000	DBBE-100kg-006-000
DBBE	150kg	006	000	DBBE-150kg-006-000
DBBE	200kg	006	000	DBBE-200kg-006-000
DBBE	300kg	006	000	DBBE-300kg-006-000
DBBE	500kg	006	000	DBBE-500kg-006-000
DBBE	750kg	006	000	DBBE-750kg-006-000
DBBE	1000kg	006	000	DBBE-1000kg-006-000



APPLIED MEASUREMENTS LTD.
Transducer Specialists...

+44 (0) 118 981 7339

info@appmeas.co.uk

<https://appmeas.co.uk>

Ordering Codes (continued):

Core Product	Capacity (inc Engineering Units)	Cable Length (m)	Specials Code	Example Result
DBBWAS	1500kg	006	000	DBBWAS-1500kg-006-000
DBBWAS	2000kg	006	000	DBBWAS-2000kg-006-000
DBBWAS	3000kg	006	000	DBBWAS-3000kg-006-000
DBBWAS	5000kg	006	000	DBBWAS-5000kg-006-000
DBBWAS	6000kg	006	000	DBBWAS-6000kg-006-000

Associated Products:



[TR150 Handheld Indicator](#)



[T24 Wireless Telemetry Range](#)



[Intuitive4-L Panel-Mount Indicator](#)



[DSC-USB USB Signal Digitiser](#)



[ICA Miniature Strain Gauge Amplifier](#)



[SGA Signal Conditioner/Amplifier](#)

Mounting and Installation Accessories:

Helping You Get The Best Possible Performance From Your Load Cell.

Load Buttons and Rod End Bearings

Designed to align forces through the principle axis of the load cell thus reducing the effects of extraneous forces, hence offering improved performance from the cell.


Load buttons are used where compressive forces are applied.

Rod End Bearings are used where tensile forces are being applied.



Dimensions in mm:

Load Buttons for Compression Use

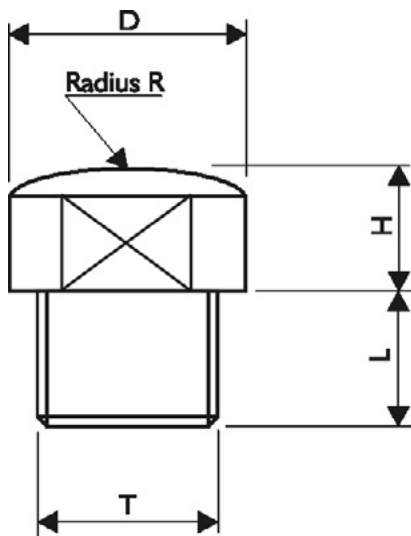

THREAD T	M12 x 1.75	M16 x 2	M24 x 2
D	22	32	26
H	6	10	14
L	12	16	26
R	150	180	200

Rod End Bearings for Tension Use

Key Features:

- Supports radial loads in a tensile or compressive direction.
- Transmit slow movements with small or moderate swivel angles.
- Suitable for unilateral loads - can support alternating loads and alternating loads in combination with bearing GE..UK-2RS.
- Zinc plated for corrosion resistance.
- Are maintenance-free.
- Sealed maintenance-free rod ends use lip seals to protect against contaminants and water spray.
- Fitted with radial spherical plain bearings GE..UK
- Hard chromium/PTFE composite sliding contact surfaces.
- Right hand or left hand internal or external thread.
- Enables compact adjacent construction thanks to its thin walled design of the eye housing.



GAR..UK
(right hand thread)

GAL..UK
(left hand thread)

- To ISO 12 240-4, dimension series E, type M
- Shank with external thread
- For shaft diameters from 6mm to 30mm



APPLIED MEASUREMENTS LTD.

Transducer Specialists...


+44 (0) 118 981 7339

info@appmeas.co.uk

<https://appmeas.co.uk>

Maintenance-free
 ISO 12 240-4, dimension series E, type M
 Sliding contact surface: hard chromium/PTFE

Series GAR..UK
 Sliding material: PTFE composite

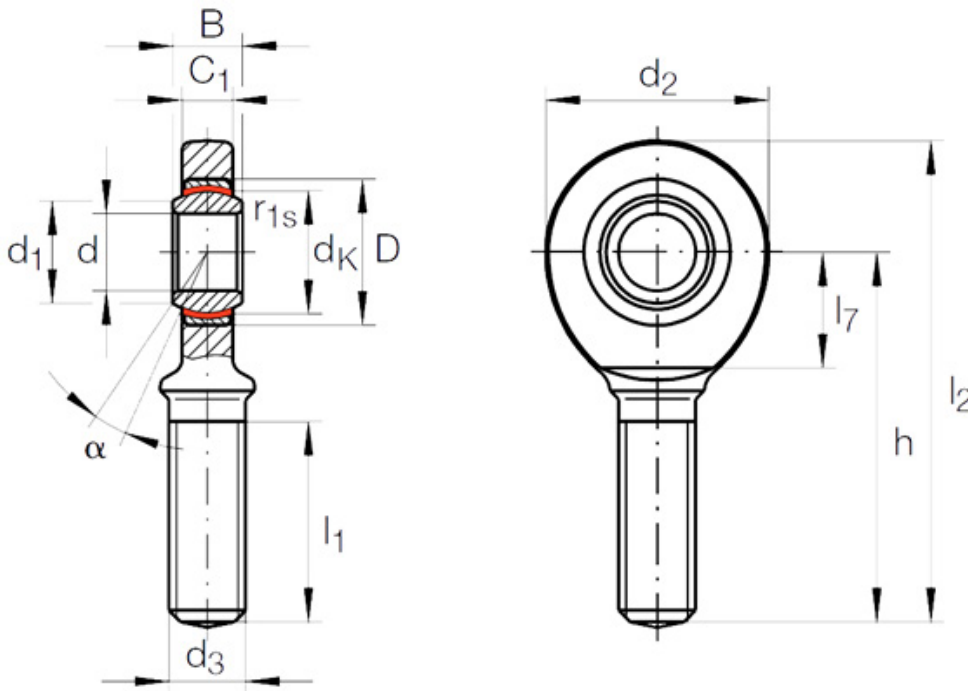

TYPE	SHAFT DIAMETER	DESIGNATION ¹⁾		MASS ≈ kg	DIMENSIONS						
		WITHOUT SEALS	WITH SEALS		d	D	B	d _k	d ₁	d ₂	d ₃
DBBE-50-1000kg	12	GAR 12 UK	-	0.086	12 _{-0.008}	22	10 _{-0.12}	18	14.9	34	M12
DBBWAS-1500-2000kg	17	GAR 17 UK	-	0.19	17 _{-0.008}	30	14 _{-0.12}	25	20.7	46	M16
DBBWAS-3000-6000kg	25	GAR 25 UK	-	0.56	25 _{-0.01}	42	20 _{-0.12}	35.5	29.3	64	M24 x 2

TYPE	h	C ₁	Degrees			Chamfer Dimension	Basic Load Ratings		Radial Internal Clearance	Shaft Diameter	
			α	l ₁	l ₂		l ₇	r1s min.			dyn. Cr N
DBBE-50-500kg	54	8	11	28	71	18	0.3	11 400	30 100	0 - 0.032	12
DBBW-1500-2000kg	69	11	10	36	92	23	0.3	22 400	56 500	0 - 0.04	17
DBBW-3000-6000kg	94	17	7	53	126	32	0.6	51 000	104 000	0 - 0.05	25

1) For a left hand thread, the R is replaced by an L (example: GAL..).