

ROTARY

TORQUE SENSOR

with optional RPM Sensor

**YDR/YDRA
SERIES**



- Torque Ranges 0-10Nm to 0-80kNm
- 0.09% Accuracy Class
- Suitable for continuously rotating applications
- Slip ring technology
- YDR model with RPM sensor
- 3 YEAR WARRANTY

Options Available

Mounting pedestal

Customer-specific measuring ranges

Supplied With Any Instrumentation and Calibrated as a Complete System with Traceable Certificate

DESCRIPTION

The YDR/YDRA is designed specifically where high accuracy (0.09%) is required. Both the YDA and YDRA torque transducers use slip rings for data transfer. Robust construction and minimal size make them ideal for applications in demanding applications and where there are space restrictions.

The YDR model includes an RPM sensor to measure rotational speed simultaneously with torque.

The YDR/YDRA series can be further complimented by any of our range of instrumentation

Transducer Specialists...

APPLIED MEASUREMENTS LIMITED


3 MERCURY HOUSE - CALLEVA PARK - ALDERMASTON - BERKSHIRE - RG7 8PN - UK

Tel: (+44) 0118 981 7339 Fax: (+44) 0118 981 9121 email: info@appmeas.co.uk Internet: www.appmeas.co.uk



SPECIFICATION

CHARACTERISTICS	YDR	YDRA	UNITS
Torque Ranges:	0-10Nm up to 0-80kNm	0-10Nm up to 0-20kNm	
Rated Output (FSO):	1.5 ± 1%		mV/V
Excitation Voltage:	10		VDC
Safe Overload:	150		% FSO
Non-Linearity:	0.09		±% FSO
Repeatability:	0.09		±% FSO
Hysteresis:	0.08		% FSO
Temperature Range Operating:	-20 to +70		°C
Compensated:	-10 to +60		°C
Temperature Effect on Zero:	0.005		±%FSO/°C
Temperature Effect on Output:	0.005		±%FSO/°C
Terminal Resistance (Input/Output):	350		ohms
Insulation Resistance:	300		Megaohms at 500VDC
Environmental Protection:	IP50		
Cable:	3m screened, Ø7 mm		
RPM Output:	60 pulses/revolution	None	

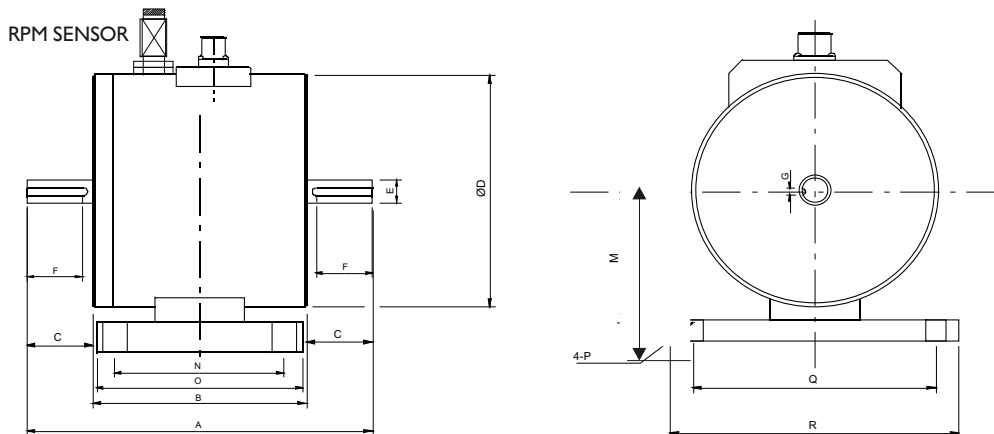

YDR	CAPACITY (Nm)	A	B	C	ØD	ØE	F	G	M	N	O	ØP	Q	R	RPM
	0-10, 0-20	219	120	49.5	101	20	35	5x5	72.0	78	98	7	97	117	6,000
	0-50, 0-100	235	130	52.5	107	23	40	7x7	72.0	78	97	7	97	118	6,000
	0-200, 0-500	287	150	68.5	114	38	50	10x8	72.0	78	99	7	97	118	4,000
	0-1k, 0-2k	350	150	100	140	63	80	18x11	91.0	78	105	9	125	152	4,000
	0-5k, 0-10k	500	220	140	172	90	115	25x14	114.0	118	148	11	162	192	2,000
	0-20k	680	264	208	210	115	160	32x18	138.0	172	212	13	190	230	2,000
	0-50k	680	264	208	210	115	160	32x18	138.0	172	212	13	190	230	2,000
	0-80k	680	264	208	280	180	170	45x25	180.0	180	220	21	300	350	2,000
YDRA	CAPACITY (Nm)	A	B	C	ØD	ØE	F	G	M	N	O	ØP	Q	R	RPM
	0-10, 0-20	191	101	45	101	20	40	5x5	63.5	78	96	7	108	128	6,000
	0-50, 0-100	195	105	45	107	23	40	8x7	66	78	97	7	114	135	6,000
	0-200, 0-500	247	107	70	114	38	60	10x8	72	78	102	9	121	141	4,000
	0-1k, 0-2k	313	113	100	140	63	80	18x11	91	78	102	9	147	173	4,000
	0-5k, 0-10k	390	130	130	172	90	100	25x14	101	100	126	11	154	180	2,000
	0-20k	440	140	150	210	115	120	32x18	130	110	148	13	190	228	2,000

